


Hi-Flø M7 50+

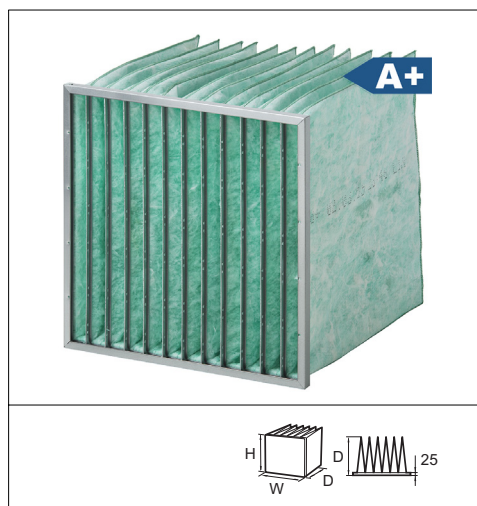

Advantages

- Eurovent Energy Rating A+
- Large surface area
- New developed energy efficient media
- New developed pocket design for the best air distribution
- Conical pockets
- Low pressure drop
- High dust holding capacity

Application: Air conditioning applications.

Type: Extended surface multi pocket bag filter.

Case: Galvanised steel.

Media: Glass Fiber.

EN779:2012 efficiency: F7.

Recommended final pressure drop: 450 Pa (suggested economical change point 250Pa).

Temperature: 70°C maximum in continuous service.

Holding frames: Front and side access housings and frames are available, Type 8, Type L, and FC Housings.



Model Name	Filter class	Width	Height	Depth	Air flow m ³ /h	Pressure drop	Bags	Area m ²	Volume m ³	Weight kg	Initial eff. %	ME %*	Energy consumption kWh/y**	Energy class***
M7 50+	F7	592	592	640	3400	60	12	9,1	0,05	3,3	56	54	764	A+
N7 50+	F7	490	592	640	2800	60	10	7,6	0,05	3				A+
O7 50+	F7	287	592	640	1700	60	6	4,6	0,03	2				A+
O7-33 50+	F7	287	287	640	800	60	6	2,3	0,02	1,5				A+
M7-63 50+	F7	592	287	640	1700	60	12	4,6	0,03	2				A+
M7-65 50+	F7	592	490	640	2800	60	12	7,6	0,05	3				A+
ML7 50+	F7	592	892	640	5000	60	12	13,7	0,1	3				
NL7 50+	F7	490	892	640	4100	60	10	11,4	0,1	2,7				
OL7 50+	F7	287	892	640	2500	60	6	6,8	0,05	1,8				

* ME%: Minimum efficiency ref. to EN779:2012

** Energy Consumption, kWh/year: Calculated according to Eurovent Guideline 4/21-2014

*** Energy class: according to Eurovent RS 4/C/001-2015